




Channel in HD-PE 4ALL 100/70

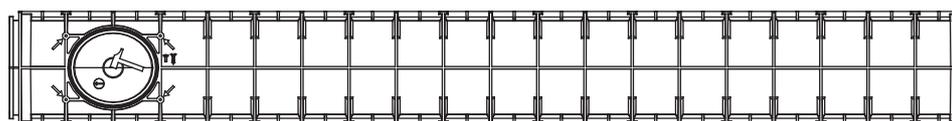

BOTTOM VIEW

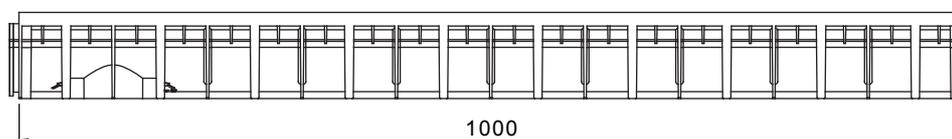

LATERAL VIEW



FRONT VIEW

Watertight: in order to obtain the channels watertight, it is recommended the use of a bituminous silicone sealant. A through and long-lasting guarantee to avoid any leakages can be obtained by welding the joints.

Data Sheet

The products have to be installed according to MufleSystem's specifications (available on our web site)

Dimensions and features

NB: Dimensions and weights are under normal production tolerances

Lenght (mm)	1000
External width (mm)	120
External height (mm)	92
Internal width (mm)	100
Internal height (mm)	70
Outlets	1 x Ø110 + 1 x Ø75* or 1 x Ø100 + 1 x Ø75*
Material	HD-PE
Weight (Kg)	0.88

*The outlet is made of "Kit Bottom Outlet".

Gratings

Slotted	Galvanized steel	Class A15
Slotted	HD-PE	Pedestrian
Slot	HD-PE	Class A15