

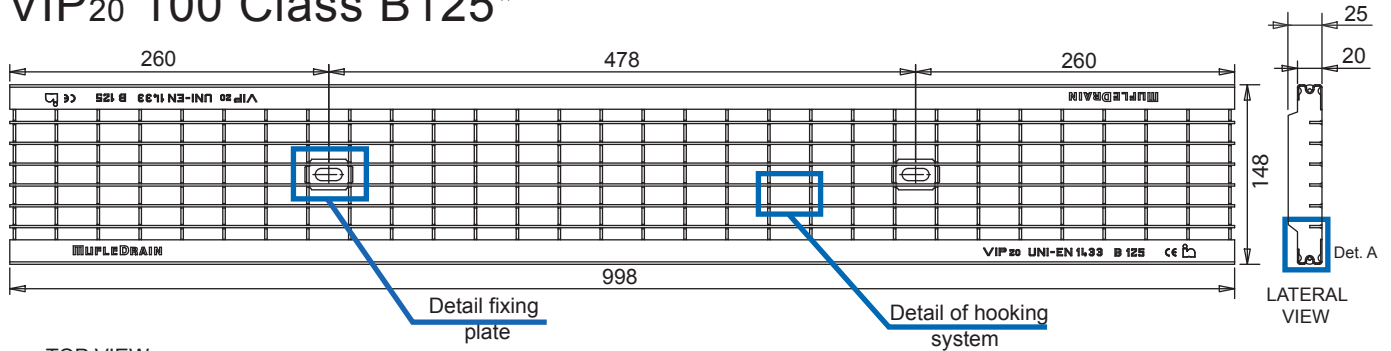



## Anti-heel mesh grating in galvanized stinless and steel VIP20 100 Class B125\*



TOP VIEW



\*In accordance to the norm EN 1433

The product have to be installed according to MufleSystem's specifications (available on our web site)

## Data Sheet

### Dimension and feautures

NB: Le dimensioni ed i pesi sono soggetti alle normali tolleranze di fabbricazione

Length(mm)	998
Total width (mm)	148
Total height (mm)	20
Depth (mm)	25
Slot height (F1xF2)	15.2 X 32.2
Material	Galvanized Steel DX51D/Stainless steel AISI 304
Weight (Kg)	3.60
Draining surface (dm <sup>2</sup> )	8.82
Fixing system	Tie-rod
Surface finishing	Galvanization / ***
Resistance (Norm UNI EN 1433)	B125

### Application

### For channel

Galvanized steel	Stainless steel
Pavements Lay-bys and private car parks	Pavements Lay-bys and private cars parks Food factories Chemically aggressive environments

Vip20 100/160  
Vip20 100/100