


Ductile iron grating VIP20 150 Class C250*

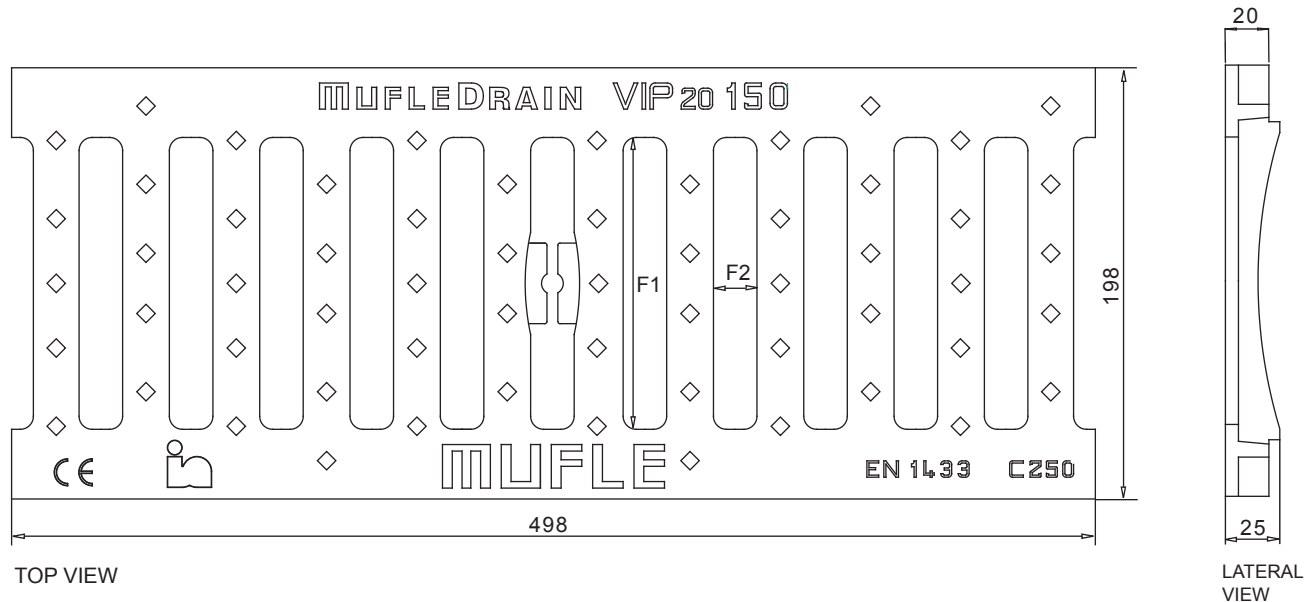

TOP VIEW

LATERAL VIEW

*In accordance with the norm EN 1433

The product have to be installed according to Mufle's specifications (available on our web site)

Data sheet

Dimension and features

NB: Dimension and weights are subjected to the normal tolerances of the manufacturing

Length (mm)	498
Total width (mm)	198
Total height (mm)	20
Depth (mm)	25
Slot height (F1x F2 mm)	132 x 20
Material	Ductile Iron GJS 500/7 (EN 1563)
Weight (kg)	5.20
Draining surface (dm ²)	3.16
Fixing system	Tie rod
Surface finishing	Epoxy paint
Resistance (Norm UNI EN 1433)	Class C250

Application

Parking areas, multilevel parking areas, street side

For channels

Vip20 150/160	Smart 150/160
Vip20 150/100	Smart 150/100